



No.	DATE	DESCRIPTION	REV	REMARK : RoHS REQUIREMENT APPLIED (符合RoHS)	DATE	DRAWING NO.
-----	------	-------------	-----	---	------	-------------

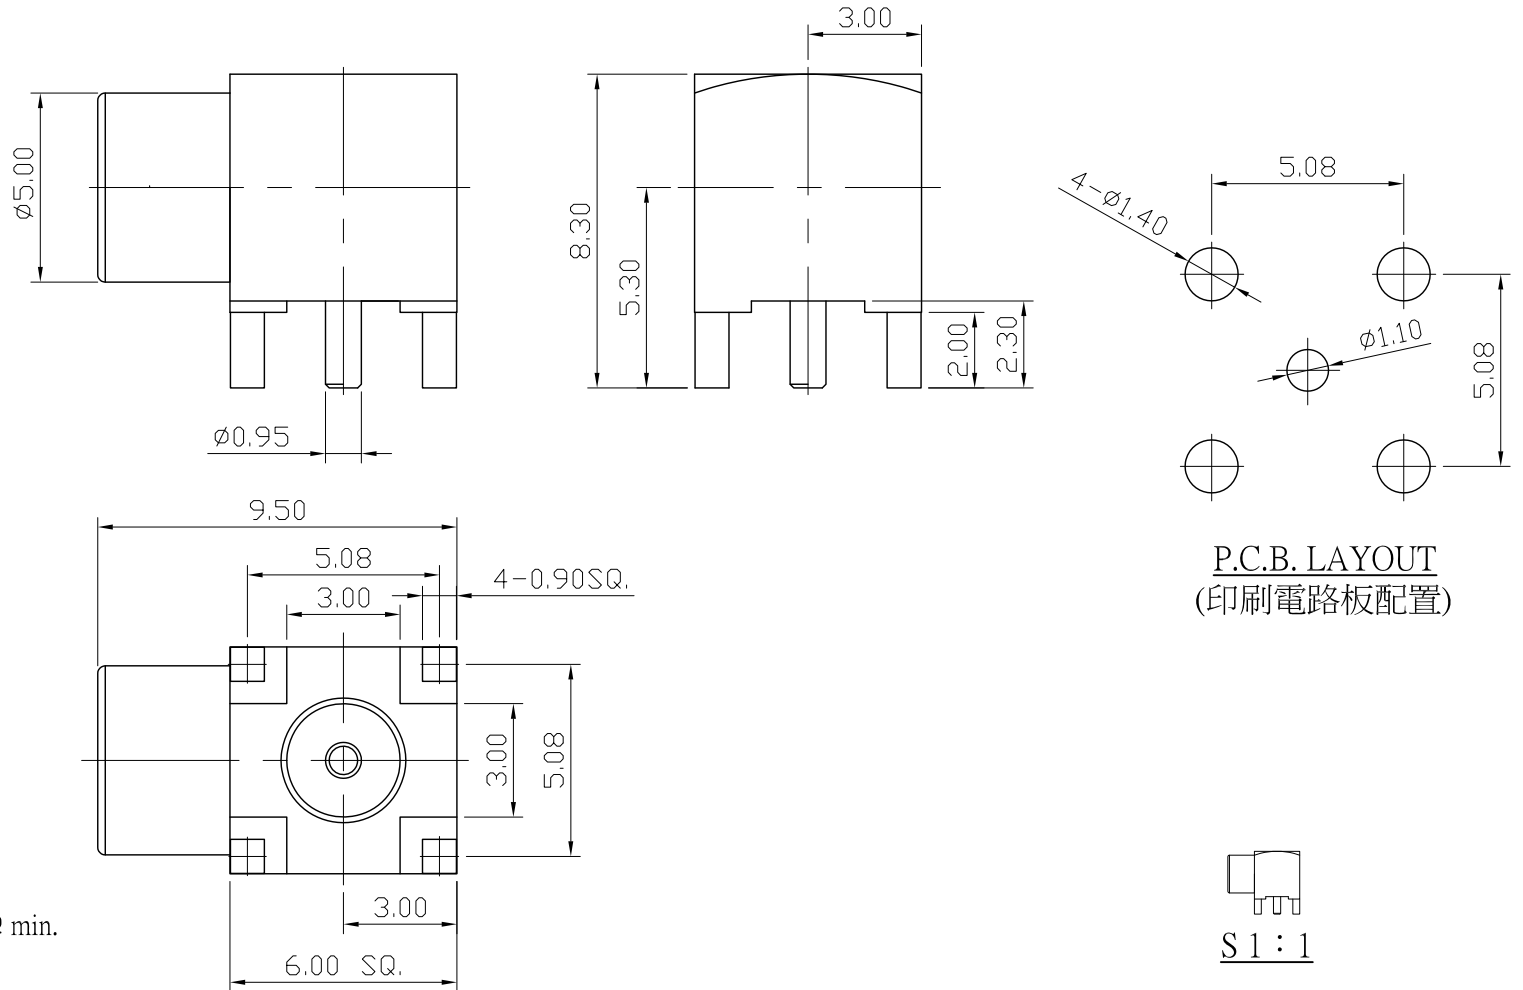

Electricals:

1. Impedance: 50 Ohm.
2. Frequency range: DC~6 GHz
3. Working Voltage: 335V rms min.
4. Dielectric Withstanding Voltage: 1000 MΩ min.
5. Operating Temperature: -55°C~+85°C

					DIMENSIONS ARE IN MILLIMETERS			CHECKED		 雅鈦企業有限公司 Aec Connectors Co., Ltd.	
					UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差)			DRAWN			
-	insulator b	1	PTFE	white	0.5~6 = ±0.2			Chad		TITLE	MCX R/A JACK REVERSE PCB MOUNT, 50 Ohm
-	body b	1	brass	gold	>6~30 = ±0.4			DATE		DRAWING NO.	MC-1006AGTG-RA0035
-	contact pin	1	brass	gold	>30~120 = ±0.6			2015. 05. 21		FILE NO.	DRAWING\RF\MCX\MC-1006AGTG-RA0035
-	insulator a	1	PTFE	white	>120~315 = ±1						
-	body a	1	brass	gold	>315~1000 = ±1.6						
NO.	Description	Unit	Materials	Finish	Drawing No.	SCALE	5 : 1	UNIT	MM		